



Structure: IBF 30"x30"
 Job Number:
 Job Name: Jones and Sons Precast
 Job Location:

Specification: 30"x30"
 Contractor:



Based on:
 Take Off By: 2/4/2020 Caleb

Design Build Height Top of Casting + 500.00' Floor Elevation - 496.00' Design Height = 4.00'		Stack Build Height Base Gain + 4.00' Design Height = 4.00' Floor Thickness + 0.67' Outside Height = 4.67'		Manufacture Date:	
				Ship Date:	
				Frame/Ring:	
				Channel:	
				Coating:	
				Mix:	
				Notes: <i>Sizes can vary from 12" to 60"</i>	

Elevation (View A-A)



Openings

ID	Invert	Pipe Size	Hole Size	Connector	Angle
----	--------	-----------	-----------	-----------	-------

Plan View

500.00'
TOP
500.00'
FLOW

495.33'
PREP

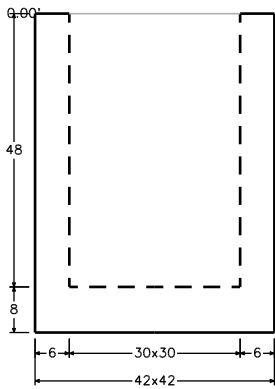

BOM For Stack

ID	Description	Qty.	Weight
A	30"x30" Base 8F 48HI	1	4,814
Totals (precast, lbs)		1	4,814