



QUALITY PACKAGED CONCRETE PRODUCTS NATIONWIDE

Description:

PAKMIX® Mortar Mix is a specially formulated blend of Portland cement, lime or fire clay and fine sand. This product is ideal for use in the laying of bricks, block or stone. All ingredients are thoroughly pre-mixed to ensure maximum strength and workability. Simply add water. Meets or exceeds strength requirements of ASTM C-387 for Type N mortar when used as directed.

Suggested Uses:

- ▶ Lay Brick.
- ▶ Set Blocks.
- ▶ Tuck Pointing.
- ▶ Patching.
- ▶ Stuccoing.
- ▶ Repair Chimneys.
- ▶ Stone Work.

Preparation:

All surfaces should be clean and free of oil, gas, paint, grease, etc., before applying mix.

Directions for Mixing:

Pour the estimated amount of PAKMIX® Mortar Mix into a clean wheelbarrow, mortar box or similar easy-to-use container. Form a crater with a shovel or hoe in the center of the dry mix. Pour clean water into the crater at the rate of approximately one quart per 15 (lbs.) pounds of dry material. If the mix is too stiff, add more water, one (1) cup at a time. Mortar should have the consistency of thick batter.

Items you many need:

- ▶ Mortar Box or Wheelbarrow.
- ▶ Regular or Rectangular Trowel.
- ▶ Shovel or Hoe.
- ▶ Snap Line & Level.
- ▶ Hammer.
- ▶ Chisel.

Packaging & Yields:

80 pound (80 lb.) bag will lay approximately 26' 8" x 16" concrete blocks or 64 common bricks with 3/8" joint. Approximately 2/3 cu. ft. wet volume.

60 pound (60 lb.) bag will lay approximately 20' 8" x 16" concrete blocks or 48 common bricks with 3/8" joint. Approximately 3/5 cu. ft. wet volume.

For Best Results:

Use only when temperature is 40° F and rising. In cold weather use warm – not hot water for mixing.

Dampen the block or the repair area before applying the new mortar to prevent premature drying of the new material.

Keep the new mortar damp for at least three (3) days by an occasional fine spraying with water.

Clean Up:

Clean up is easy with soap and water. Rinse tools before material hardens.

Caution:

PAKMIX® Mortar Mix contains Portland cement. As with any cement materials, direct contact may irritate eyes and skin. Wear protective clothing, gloves and eye protection when using the product. If any material gets into the eyes, rinse immediately and contact a physician. Wash exposed skin areas promptly with water. Do not take internally.




Harmful if inhaled. This product contains Free Silica (CAS# 14808-60-7). When Free Silica is inhaled, it may cause delayed respiratory and other health problems. Free Silica has been listed by I.A.R.C. as a possible carcinogen based upon laboratory animal test data and limited evidence of human carcinogenicity. Avoid breathing cement dust. Keep the bag closed when not in use, and use only in well-ventilated areas. Follow OSHA Safety and Health Standards for crystalline silica. If the product must be used in an enclosed area, use a NIOSH approved dust respirator.

Warning:

For structural use or to meet Code Requirement use PAKMIX Type S Mortar.

Keep Out of Reach of Children:

Material safety data sheet available upon request.

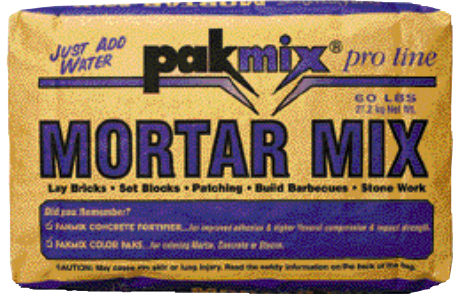

605 Industrial Way, Dixon, California 95620
(800) 272-5649 • FAX (707) 693-9349
www.pakmix.com

MORTAR MIX
PRO LINE

MORTAR MIX